
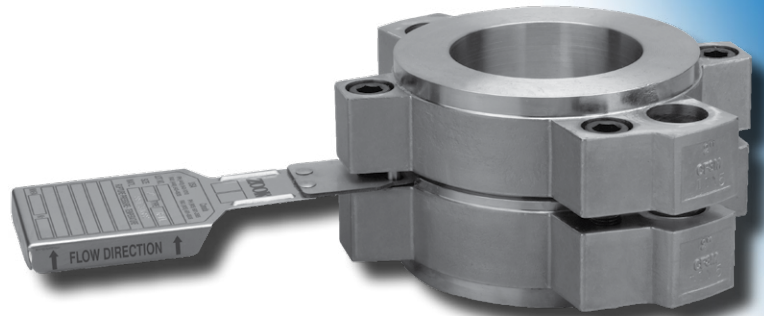


Features

- The FAC Series is a slotted metal top section and allows the use of metal & teflon seal materials. A wide variety of corrosive resistant seal materials are available.
- State-of-the-art laser slotted metal burst cap
- Operating ratios up to 85% of the low end of burst tolerance
- Unique alignment pin design ensures proper disk orientation into FAH series disk holder
- Disk design offers high cycle life
- Excellent for liquid, gas or 2 phased flow
- Wide range of standard and exotic materials available
- Sizes from 1" (25mm) through 12" (300mm)
- Burst ratings from 3 psig (0.21 barg) to 2500 psig (172.37 barg)
- 3-dimensional stainless steel tag permanently engraved with complete disk specifications
- CE (PED), and TÜV compliance available

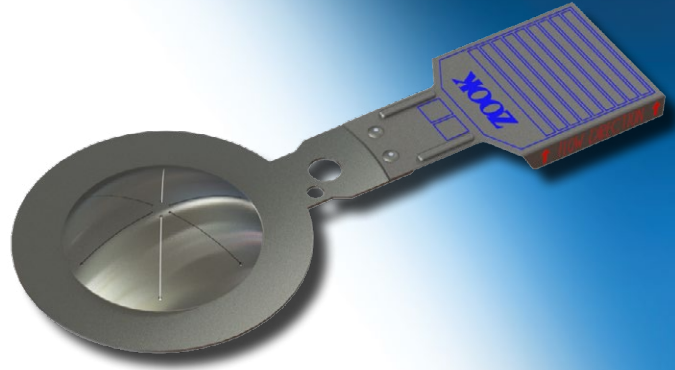


FAC Series disk mounts into FAH Series disk holder (refer to FAH Series data sheet)

Options

- FAC-V* **Vacuum Supports** are required on vacuum services. Vacuum supports are attached to the process side of the disk and allow the disk to support a full system vacuum
- FAC-R* **Protective Rings** are recommended with FAC Series disks to protect delicate materials and/or to provide stability when vacuum supports are not supplied
- FAC-H* **Handling Supports** are attached to the process side of the disk to protect disk seals when vacuum supports are not supplied
- FAC-BI* Equipped with ZOOK's Integral **Burst Indicator**

*Note: The maximum temperature rating of rupture disks supplied with liners and BI's is lower than the base disk material.

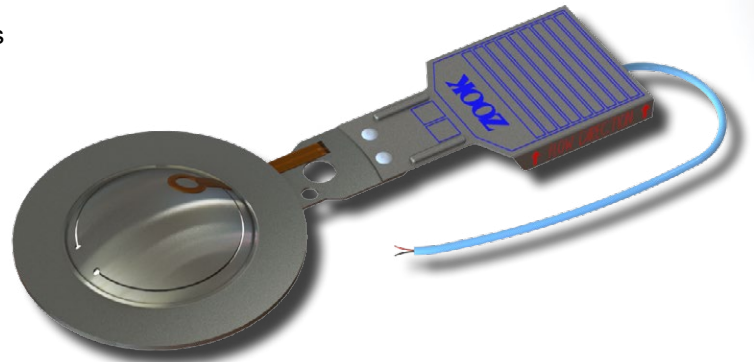

FAC Series Specifications

Minimum and Maximum Pressure Ratings - psig (barg) @ 72°F (22°C)

Disk Size	Minimum Burst Pressures with Listed Seal Materials									Maximum Burst Pressure	MNFA in ² (mm ²)	
	Burst Cap Materials: 316, Inconel, Monel, Nickel or Hastelloy C276								FAC		FAC-V FAC-V-BI FAC-BI	
	316	Inconel	Monel	Nickel	Hastelloy C276	Aluminum	PFA Teflon					
1"	400	300	240	185	400	60	25	2500	0.86	0.77		
25 mm	27.59	20.69	16.55	12.76	27.59	4.14	1.72	172.41	554	496		
1-1/2"	275	200	155	125	275	35	20	2000	2.04	1.68		
40 mm	18.97	13.79	10.69	8.62	18.97	2.41	1.38	137.93	1316	1083		
2"	165	120	90	80	165	25	15	1500	3.36	3.23		
50 mm	11.38	8.28	6.21	5.52	11.38	1.72	1.03	103.45	2167	2083		
2-1/2"	145	105	80	65	145	20	13	1250	4.79	4.16		
65 mm	10.00	7.24	5.52	4.48	10.00	1.38	0.90	86.19	3090	2683		
3"	125	95	70	55	125	15	10	1000	7.39	6.34		
80 mm	8.62	6.55	4.83	3.79	8.62	1.03	0.69	68.97	4767	4090		
4"	90	75	50	40	90	12	8	900	12.73	10.30		
100 mm	6.21	5.17	3.45	2.76	6.21	0.83	0.55	62.07	8212	6645		
6"	75	60	40	35	75	10	6	700	28.89	24.31		
150 mm	5.17	4.14	2.76	2.41	5.17	0.69	0.41	48.28	18638	15683		
8"	60	40	35	25	60	8	5	600	50.03	38.34		
200 mm	4.14	2.76	2.41	1.72	4.14	0.55	0.34	41.38	32277	24735		
10"	45	30	30	22	45	7	4	500	78.85	67.52		
250 mm	3.1	2.07	2.07	1.52	3.1	0.48	0.28	34.48	50870	43561		
12"	40	25	25	19	40	7	3	400	113.10	90.08		
300 mm	2.76	1.72	1.72	1.31	2.76	0.48	0.21	27.59	72967	58116		
Max. Temp.	900°F (482°C)	900°F (482°C)*	800°F (427°C)	750°F (399°C)	900°F (482°C)	600°F (316°C)	500°F (260°C)					

- Notes: * Contact ZOOK for higher temperatures
 • For materials, sizes, burst ratings and temperatures not shown, contact ZOOK
 • Maximum temperature rating of rupture disks supplied with a BI is 400°F (200°C)

Table Tolerance

Table Tolerance - ZOOK											Table Tolerance - PED					
Burst Pressure Range (psig)		ZOOK Manufacturing Design Range (psig)								Burst Tolerance	Burst Pressure Range (barg)		Total Performance Tolerance			
		Standard		Reduced Tolerance				Standard	Reduced Tolerance							
		Minimum	Maximum	Minus	Plus	Minus	Plus		Minus		Plus	Minus	Maximum	Good	Better	Best
Min	<1.0	0	0.3	0.00	0.15	0.00	0.15	0.00	0.00	± 0.25 psig	Min	<0.069	±75%	±73%	±70%	±0.017 barg
1.0	<2.5	0.5	0.5	0.25	0.25	0.13	0.13	0.00	0.00	± 0.33 psig	0.069	<0.172	±65%	±45%	±35%	±0.023 barg
2.5	<4.0	1	1	0.50	0.50	0.25	0.25	0.00	0.00	± 0.5 psig	0.172	<0.276	±50%	±30%	±20%	±0.035 barg
4.0	<7.0	1	2	0.50	1.00	0.25	0.50	0.00	0.00	± 0.5 psig	0.276	<0.483	±50%	±30%	±20%	±0.035 barg
7.0	<11.0	1.5	2.5	0.75	1.25	0.38	0.63	0.00	0.00	± 0.8 psig	0.483	<0.759	±50%	±30%	±20%	±0.055 barg
11.0	<15.0	2	3	1.00	1.50	0.50	0.75	0.00	0.00	± 1.3 psig	0.759	<1.034	±25%	±20%	±15%	±0.090 barg
15.0	<17	2	3	1.00	1.50	0.50	0.75	0.00	0.00	± 2.0 psig	1.034	<1.172	±25%	±20%	±15%	±0.138 barg
17	<26	2	4	1.00	2.00	0.50	1.00	0.00	0.00	± 2.0 psig	1.172	<1.793	±25%	±20%	±15%	±0.138 barg
26	<40	3	5	1.50	2.50	0.75	1.25	0.00	0.00	± 2.0 psig	1.793	<2.758	±20%	±15%	±10%	±0.138 barg
40	<66	4	6	2.00	3.00	1.00	1.50	0.00	0.00	± 5%	2.758	<4.552	±15%	±10%	±7.5%	±5%
66	<101	5	9	2.50	4.50	1.25	2.25	0.00	0.00	± 5%	4.552	<6.966	±15%	±10%	±7.5%	±5%
101	<151	6	12	3.00	6.00	1.50	3.00	0.00	0.00	± 5%	6.966	<10.412	±10%	±7.5%	±6.5%	±5%
151	<201	9	16	4.50	8.00	2.25	4.00	0.00	0.00	± 5%	10.412	<13.859	±10%	±7.5%	±6.5%	±5%
201	<351	12	23	6.00	11.50	3.00	5.75	0.00	0.00	± 5%	13.859	<24.201	±10%	±7.5%	±6.5%	±5%
351	<500	15	30	7.50	15.00	3.75	7.50	0.00	0.00	± 5%	24.201	<34.474	±10%	±7.5%	±6.5%	±5%
500	Max	3%	6%	1.5%	3.0%	0.75%	1.5%	0.00	0.00	± 5%	34.474	Max	±10%	±7.5%	±6.5%	±5%

Teflon - TM The Chemours Company
 Inconel - TM Special Metals Corporation
 Monel - TM Special Metals Corporation
 Hastelloy - TM Haynes International



FAC_032019

Visit us at www.zookdisk.com

SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive
 Chagrin Falls, Ohio 44022
 United States

Toll Free: +1 800 543 1043
 Phone: +1 440 543 1010
 Fax: +1 440 543 4930
 E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.
 Killamarsh, Sheffield, S21 1AL
 United Kingdom

Phone: +44 (0) 1909 560999
 Fax: +44 (0) 1909 560860
 E-mail: sales.europe@zookdisk.com

SERVING CANADA

4400 South Service Road
 Burlington, Ontario, L7L 5R8
 Canada

Toll Free: +1 800 370 6057
 Phone: +1 905 681 2885
 Fax: +1 905 681 8838
 E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC

Unit No. 23A-05, Menara Landmark
 No.12, Jalan Ngee Heng
 80000 Johor Bahru, Johor,
 Malaysia

Phone: +60 (7) 2910099
 Fax: +60 (7) 2910096
 E-mail: sales.asia@zookdisk.com



Safety through knowledge and performance.